


# FLOOR SAW CF-4030 D

Order no: 50009738

Medium-size joint cutters with latest **exhaust emission standard stage 5** suitable for cutting in narrow building sites or areas difficult to access up to heavy-duty use on building sites with high daily output

**Delivery inclusive:**

- blade guard 1000 mm
- water pump
- latest exhaust emission standard stage 5
- telescopic visor
- cutting shaft set for Ø 600 - 1000 mm
- electrical cutting depth measurement
- hydraulic steering
- fail-safe parking brake

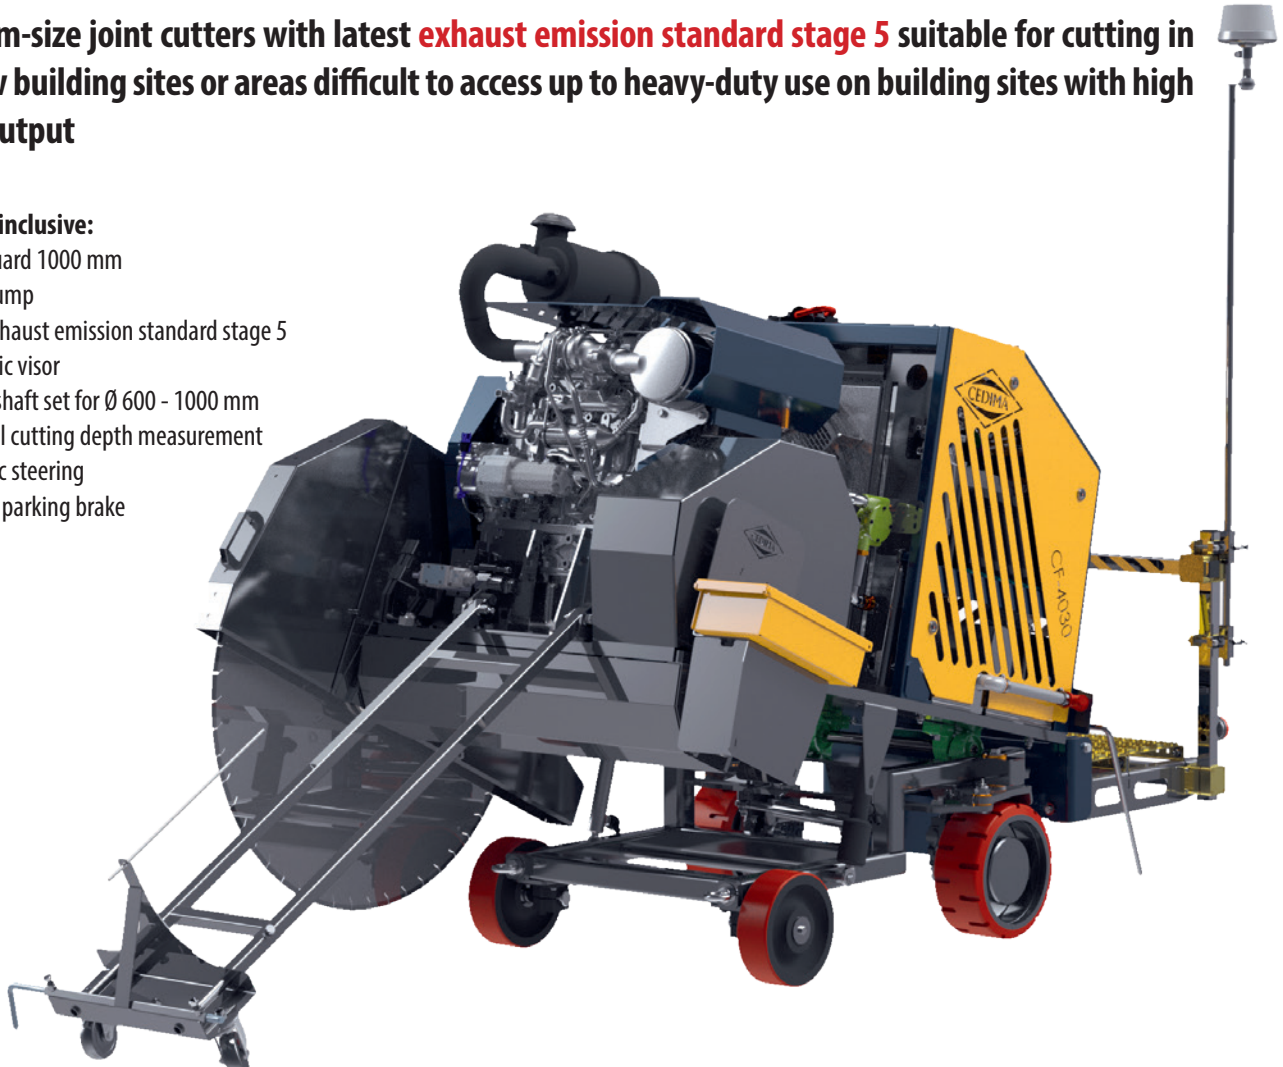

Technical data		CF-4030 D
Max. cutting depth	mm	210 - 410
Blade-Ø	mm	600 - 1000
Speed of cutting shaft		variabel
Bore hole of blade	mm	35 + 6-hole
Blade mounting		right or left
Max. mounting width	mm	20
Max. motor output	kW / PS	45 / 61,2
Motor output (net)*	kW	45*
Motor type diesel		Doosan D18
Motor starter		electric starter
Cutting depth adjustment		electro-hydraulic
Feed		hydraulic
Dimensions L/W/H (transport)	mm	1625 / 1275 / 1295
Weight	kg	980

Heavy-duty floor cutter for narrow and winding construction sites up to heavy-duty use on construction sites with high daily output. The powerful diesel engine with the latest exhaust gas standard stage 5 turbo-charged with charge air cooling, water-cooled exhaust gas recirculation and exhaust gas aftertreatment system complies with current environmental protection requirements.

The CF-4030 is delivered as a walk-behind machine as standard. A travel step with adjustable seat for the operator is available as an accessory.

On request, the CF-4030 can also be equipped with a petrol engine.

**Equipment CF-4030 Serie**

Description	Order Nr.
Driving step and adjustable seat	50003273
Extraction system for series CF-4030 type 5.5	50011964
Extraction blade guard for saw blade Ø 600 mm	50011690
Fresh concrete conversion kit CF-4030 D/B	50010840

Subject to technical and optical changes and further developments.